

## TAG SPECIFICATION

**ECO Hanger Paper Tag**  
**Sales code 500074**  
**Impinj Monza R6**




### General specification and characteristics

Operating frequency	860-960 MHz
Air interface protocol	EPC Gen2v2, ISO 18 000-63
EPC memory	96 bit
Operating temperature (electronics)	-40 °C...+85 °C / -40 °F...+185 °F
ESD voltage immunity	± 2 kV peak HBM
Shelf life: 1 year (from manufacturing date)	+20 °C / +68 °F, 50 % RH
Bending diameter	> 50 mm, tension less than 10 N

### Mechanical specification

Dimension	Item	Metric [mm]	Tolerance [mm]	US [in]
A1 x A2	Antenna size	52 x 32	± 0,5	2,047 x 1,260
B1 x B2	Die-cut size	54 x 34	± 0,5	2,126 x 1,339
C	Web width	60	± 1,0	2,362
D	Pitch length per piece (MD)	38,1	± 0,5	1,5
E	Die-cut to web edge	3	± 1,0	0,118
F	Radius	2	± 0,2	0,079

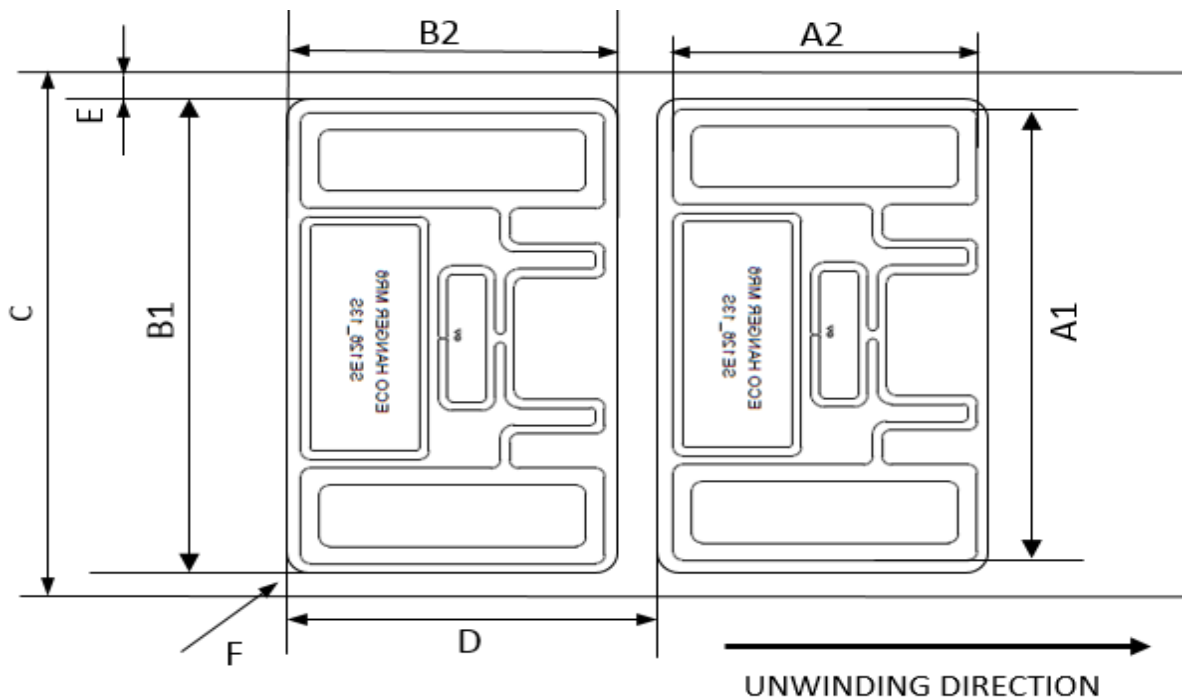

### Cross section



### Tag characteristics

Tag format	Die-cut paper label on reel	
Tag face material	White woodfree paper, 101 um	
Tag antenna material	Conductive paste	
Tag adhesive	Permanent PSA	
- Min. labelling temperature	+5 °C	+41 °F
- Service temperature	-5...+60 °C	+23...+140 °F
- Peel min.	3 N / 25 mm (FTM 2)	

### Delivery details

Min. delivery yield	100 %, defect labels removed and replaced
Consecutive faulty tags	max 0
Appearance	Single row reel form
Reel core	Card board core, inner diameter 76 mm (3 in)
Winding of the reel	Face out
Reel size	3 500 pcs/reel. Diameter: < 204 mm
Package size	28 000 pcs/box. Delivery only in full packages.

### Compliances



#### Disclaimer:

Stora Enso reserves the right to change its products and services at any time without notice. Our recommendations are based on our best knowledge and experience. As the products are used beyond our control we cannot be held liable for any damages caused when using the product. Use extra care in handling the product and observe standard storage and handling practices to minimize ESD (electro static discharge). This technical specification replaces all earlier ones.

Version history	Document history	Date	Author
1.0	Created	29.10.2019	KV